



CCT1000

Precision's Top Mount Glass Door Merchandiser Cabinets are designed to be the perfect refrigerated marketing tool. Whether you are displaying dairy products, food, bottled or canned drinks, beer, wine, or even flowers, these cabinets are sure to increase sales. Products will not only be stored at the perfect temperature, but will also be enhanced with our low energy consumption LED interior lighting system.



CCT1400

**Key Features:**

White Powder-Coated Steel Exterior And Interior

High Ambient 40°C Refrigeration System

Top Breathing & Venting Refrigeration System  
(300mm Ventilation Required)

Glass Doors As Standard

LED Lighting (6400K Daylight White)

R290 Refrigerant

50mm Zero ODP Polyurethane Insulation

+1/+4°C Refrigerator Temperature Range

Door Locks Fitted As Standard

Rifle Bore Coated Evaporators

Hi / Lo Audio Visual Temperature Alarms

Maintenance Free Condenser

90mm Heavy Duty Brake & Swivel Castors

**Options:**

Solid Doors


Triple Glazed Doors

Legs - 150mm

Remote Refrigeration System

Stainless Steel Exterior And Interior

Precision Connect

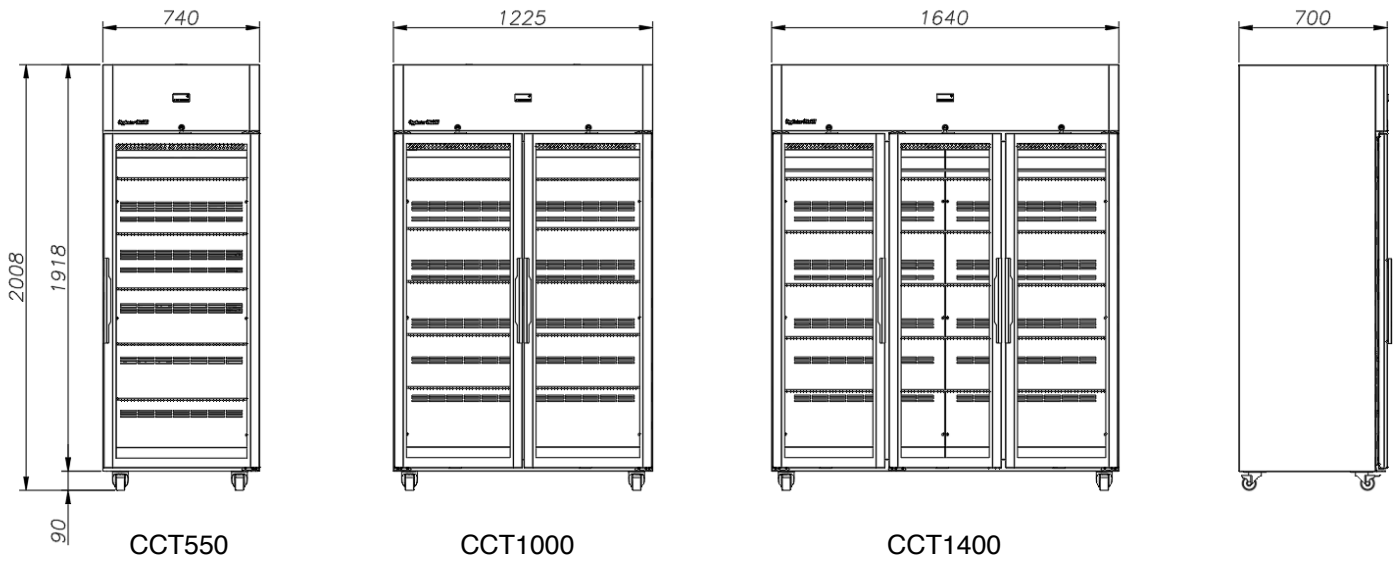

| Model                                   | CCT550                | CCT1000               | CCT1400               |
|---|-----------------------|-----------------------|-----------------------|
| Type                                    | Merchandiser          | Merchandiser          | Merchandiser          |
| Material                                | Powder Coated Int/Ext | Powder Coated Int/Ext | Powder Coated Int/Ext |
| Shelf Size (mm)                         | 620x475               | 555x495               | 508x495               |
| Number of Shelves                       | 5                     | 10                    | 15                    |
| Net Usable Volume (litres)              | 523                   | 920                   | 1260                  |
| Temperature Range                       | +1 / +4°C             | +1 / +4°C             | +1 / +4°C             |
| Exterior WxDxH (mm)                     | 740x700x2008          | 1225x700x2008         | 1640x700x2008         |
| Weight (KG)                             | 120                   | 185                   | 285                   |
| Refrigerant                             | R290                  | R290                  | R290                  |
| Refrigeration Watts (+45°C Condensing)  | 480                   | 582                   | 752                   |
| Evaporating Temp                        | -5°C                  | -5°C                  | -5°C                  |
| Heat Rejection Watts*                   | 624                   | 760                   | 980                   |
| Power                                   | 220 / 50 / 1          | 220 / 50 / 1          | 220 / 50 / 1          |
| Running Amps                            | 1.5                   | 2.1                   | 3.6                   |
| Total Electrical Load - kW              | 0.33                  | 0.46                  | 0.79                  |
| Energy Consumption / 24hrs - kWh**      | 2.95                  | 4.93                  | 6.5                   |
| Energy Consumption / Year (AEC) - kWh** | 1076                  | 1789                  | 2373                  |
| Energy Efficiency Class**               | A                     | A                     | A                     |

\* Heat Rejection is taken at the listed evaporating and condensing condition. Watts is calculated by taking the total power of the cabinet.

\*\* Tested to ISO 23953 GEMS Class: M1

We are constantly innovating and improving our products. Please always check our website for the most up-to-date version of this spec sheet